Whirlpool Gold® 36" Electric Cooktop

G9CE3675X

Key Features

- Our best-performing electric cooktop ever!
- Eco-Friendly Schott Ceran® Cooktop is easy to clean and won't crack or chip with intense heat.
- Precisely control your cooktop's lowest simmering temperatures with the AccuSimmer® Plus.
- Easy-to-use Tap Touch controls give you precise control over both high and low temperatures.
- 12/9/6" Triple Radiant Element
- 10/6" Dual Element, (3) 6" Elements
- A control lock disables the control panel to avoid unintended use or other changes to your cooking settings.
- Can be installed over a single built-in wall oven for added installation flexibility.
- ADA Compliant.

* "Our Best Performing Electric Cooktop Ever"

Whirlpool Gold® 36" Electric Cooktop

G9CE3675X

Specifications

COOKTOP MATERIAL	
Ceramic Glass	Yes
ELEMENT DETAIL	
Number of Elements	5
Left Front Size (in)	6
Left Front Power (watts)	1200
Right Front Size (in)	6
Right Front Power (watts)	1200
Left Rear Size (in)	10/6
Left Rear Power (watts)	2500/1200
Right Rear Size (in)	12/9/6
Right Rear Power (watts)	3000/1950/1050
Center Rear Element Size (in)	6
Center Rear Element (watts)	1200
COOKING SURFACE CONTROLS	
Power On Indicator Light	Yes
Hot Surface Indicator Light(s)	Yes
Control Lockout	Yes
ELECTRIC COOKTOP FEATURES	
AccuSimmer Plus®	Yes
ELECTRICAL REQUIREMENTS	
Voltage	240
Circuit Amps@240VAC	40
DIMENSIONS	
Overall Height	3 ¾
Overall Width	36 5/16
Overall Depth	21 ¾
Cutout Width	35 ½
Cutout Depth	20 ½

All dimensions are shown in inches.

COLOR AVAILABILITY	B, S

*B-Black, and S-Stainless Steel

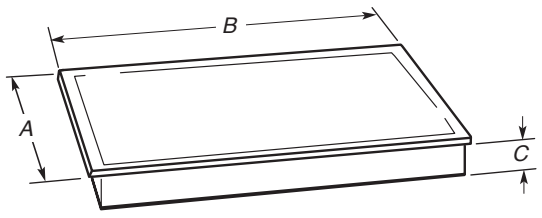

A. 21¾" (55.2 cm)
B. 30" (76.2 cm) models - 30 13/16" (78.4 cm)
36" (91.4 cm) models - 36 5/16" (92.3 cm)
C. 3¾" (9.5 cm)

Dimensions are for planning purposes only.
For complete details, see Installation Instructions packed with product.
Specifications subject to change without notice.

Dimensions

IMPORTANT: If installing a range hood or microwave hood combination above the cooktop, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

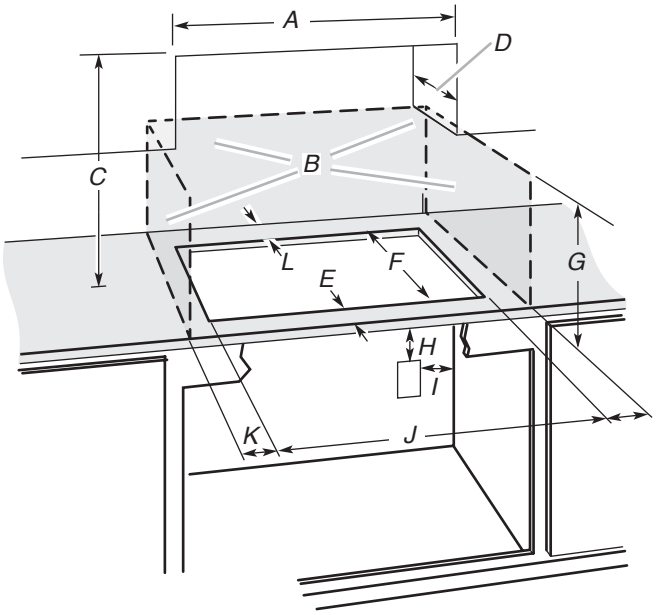

A. 30" (76.2 cm) on 30" models; 36" (91.4 cm) on 36" models
B. Combustible area above countertop (shown by dashed box above)
C. 30" (76.2 cm) minimum clearance between top of cooktop platform and bottom of uncovered wood or metal cabinet (24" [61 cm] minimum clearance if bottom of wood or metal cabinet is covered by not less than ¼" [0.6 cm] flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" [0.04 cm] stainless steel, or 0.024" [0.06 cm] aluminum or 0.020" [0.05 cm] copper)
D. 13" (33 cm) recommended upper cabinet depth
E. 2" (5.1 cm)
F. 20½" +/- 1/16" (52.0 +/- 0.16 cm)
G. 18" (45.7 cm) minimum clearance from upper cabinet to countertop within minimum horizontal clearances to cooktop
H. Junction box or outlet: 7" (17.8 cm) minimum from top of countertop
I. Junction box or outlet: 9" (23.0 cm) maximum from right side of cabinet
J. 29½" +/- 1/16" (74.9 +/- 0.16 cm) on 30" (76.2 cm) models 35½" + 1/16"/- 15/16" (90.2 cm + 0.16 cm/- 2.38 cm) on 36" (91.4 cm) models
K. 1" (2.5 cm) minimum distance to nearest left and right side combustible surface above cooktop
L. 1" (2.5 cm) minimum clearance between back wall and countertop

NOTES: After making the countertop cutout, some installations may require notching down the base cabinet side walls to clear the cooktop base. To avoid this modification, use a base cabinet with sidewalls wider than the cutout.

If cabinet has a drawer, a 5½" (14.0 cm) depth clearance from the top of the countertop to the top of the drawer (or other obstruction) in base cabinet is required.

®Registered trademark/™ Trademark of Whirlpool, U.S.A. ©2010. All rights reserved.